




3 3 Years
Standard Warranty

5 5 Years
Extended Warranty

1000V
Surge Protection



Sensor




Microwave Sensor
(Mounting height ≤8.5m)
EBTNLS1-MWS2

General Specification

Voltage 220-240Vac
50-60Hz
CRI >80
Life Time 50,000h
Power Factor >0.90
Ambient Temp -20°C to 45°C
Housing Polycarbonate



Dimensions

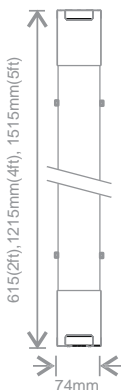

Arno-Retro

Wattage and CCT switchable retro-fit interior LED batten

- Sheet metal base box that retrofits the traditional T8 batten
- 20mm conduit entry and BESA box fitting points
- Option of base with emergency module
- High efficiency of 120lm/W
- Switchable CCT (3000K/4000K/6000K)
- 2 switchable wattage
- Easy installation with surface mounting clips.
- Plug-in motion sensor

- Plug-in corridor sensor
- Built-in emergency
- CCT switching
- Wattage switching
- Flicker free
- Modular design

CHIP OSRAM LUMILEDS
DRIVER PHILIPS LIFUD



| Order Code | Default Power | Alternative Power | Length | CCT | Lumen | Trade Price |
|--------------|---------------|-------------------|--------|-------------|---|-------------|
| EBTN1832LS16 | - | 18W | 4ft | Switchable* | 1980lm(3000K) 2160lm(4000K) 2160lm(6000K) | |
| | 32W | - | 4ft | Switchable* | 3520lm(3000K) 3840lm(4000K) 3840lm(6000K) | |
| | - | 36W | 5ft | Switchable* | 3960lm(3000K) 4320lm(4000K) 4320lm(6000K) | |
| EBTN3648LS16 | - | 36W | 5ft | Switchable* | 5280lm(3000K) 5760lm(4000K) 5760lm(6000K) | |
| | 48W | - | 5ft | Switchable* | | |
| | | | | | | |

* When CCT switchable, colour temperature switches 3000K, 4000K & 6000K

Emergency Option

| Suffix | Description | Trade Price |
|--------|--------------------------------|-------------|
| /E | Emergency with LiFePO4 battery | |

Battery

| Order Code | Type | Capacity | Voltage | Trade Price |
|-------------|---------|----------|---------|-------------|
| LFP7302-S20 | LiFePO4 | 2000mAh | 6.4V | |

Options Gear

| Type | Order code | Description | Trade Price |
|------------------|--------------|--------------------------------------|-------------|
| Microwave Sensor | EBTNLS1-MWS2 | Microwave motion and daylight sensor | |