

Bali-Standard


(595 x 1195mm)

Flicker free LED panels for schools and offices

- Save up to 60% energy usage compared to traditional fluorescent fittings
 - Low glare, UGR < 19*
 - TP(b) fire resistant polycarbonate diffuser
 - Flicker free
 - Optional DALI, 1-10V (0-10V) driver
 - IP44 when ceiling recess mounted
- White powder coated aluminium frame

- Plug-in emergency
- Plug-in on/off sensor
- Wattage switching
- Flicker free
- Modular design

CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD®

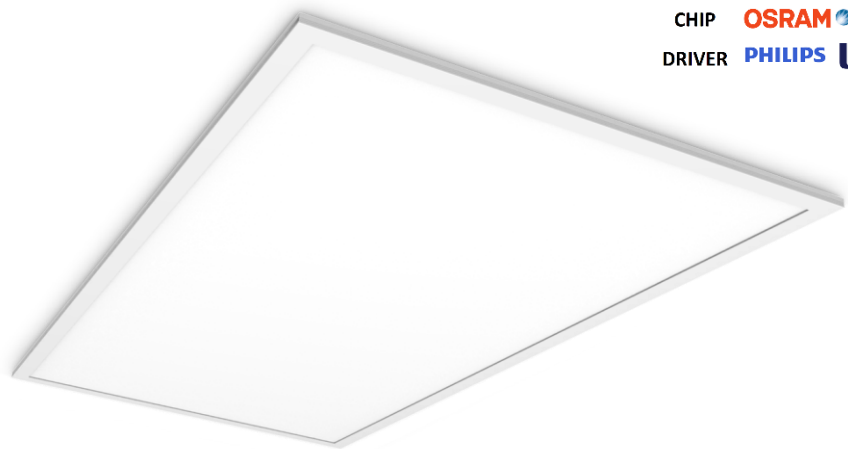

5 5 Years
Standard Warranty

7 7 Years
Extended Warranty

1000V
Surge Protection

DALI & 1-10V (0-10V)
Dimmable Options

New Optional Gear




General Specification

Voltage 220-240Vac
50-60Hz
CRI > 80
Life Time 50,000h
Power Factor > 0.90
Ambient Temp -20°C to 45°C
Housing Powder coated aluminum
Diffuser Polycarbonate TP(b)



Dimensions



Order Code	Default Power	Alternative Power	Dimension	CCT	Lumen
ELED6080PNL	60W	-	595x1195mm	4000K	6300lm
	-	80W	595x1195mm	6500K 4000K 6500K	7500lm

Optional Gears

Type	Order Code	Description	Trade Price
Dimmable driver	EYC050TDC70-140	Configurable DALI & 1-10V (0-10V) Dimmable Driver (2 x dimmable driver for ELED6080PNL)	
Emergency module	EEW03LIL/N	UEM, 3W, Li-ion battery	
Self-test emergency module	EEW03LIL/S	Self-test UEM, 3W, Li-ion battery	
Presence sensor	EYS-PRS-PNL	On/off presence sensor dedicated to LED panel	