

5 5 Years
Standard Warranty

7 7 Years
Extended Warranty

1000V
Surge Protection

DALI & 1-10V (0-10V)
Dimmable Options

New Optional Gear



Dimmable LED driver with integrated sensor

General Specification

Voltage 220-240Vac
50-60Hz
CRI >83
Life Time 50,000h
Power Factor >0.95
Ambient Temp -20°C to 45°C
Housing Powder coated aluminum
Diffuser Polycarbonate TP(b)



Bali-Surface Mount

Surface Mounted LED Panel with Emergency Option

- Save up to 50% energy usage compared to traditional fluorescent fittings
- Low glare, UGR < 19
- TP(b) fire resistant polycarbonate diffuser
- Flicker free
- Optional DALI, 1-10V (0-10V) driver


E Plug-in emergency

S Plug-in on/off sensor

F Flicker free

ECO Modular design

CHIP **OSRAM** **LUMILEDS**
DRIVER **PHILIPS** **LIFUD**

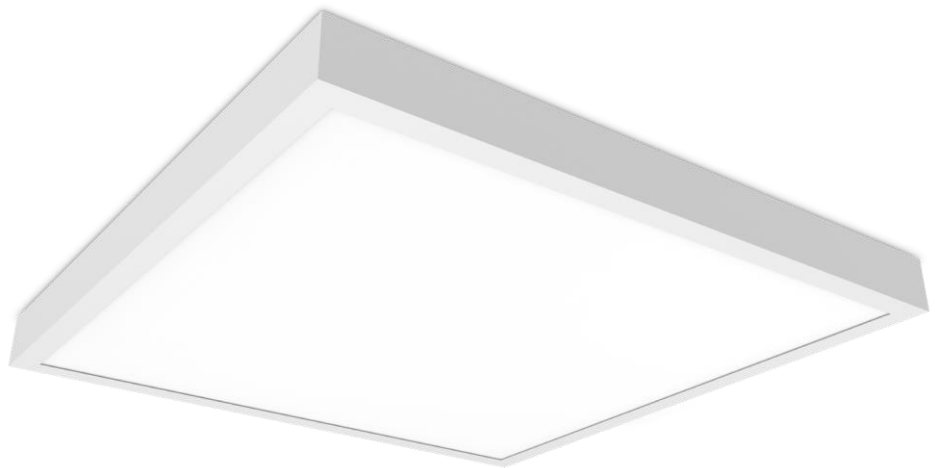

Order Code	Power	Dimension	CCT	Lumen	Trade Price
ESMT30PNL	30W	595*595mm	4000K	3200lm	

Optional Gears

Type	Order Code	Description	Trade Price
Dimmable driver	EYC030TDC30-90	(0-10V) Dimmable	
Emergency module	EEW03LIL/N	UEM, 3W, Li-ion battery	
Self-test emergency module	EEW03LIL/S	Self-test UEM, 3W, Li-ion battery	
Presence sensor	EYS-PRS-PNL	On/off presence sensor dedicated to LED panel	
Daylight harvesting	EYS50DLH-PNL	Daylight harvesting control unit	

Dimensions

