

**5** 5 Years  
Standard Warranty

**1000V**  
Surge Protection

**DALI & 1-10V (0-10V)**  
Dimmable Options

**New Optional Gear**



Standard/Self-test universal emergency module



Dimmable LED driver with integrated sensor



Optional Connector ECON3FM



**General Specification**

Voltage 220-240Vac  
50-60Hz  
CRI >80  
Life Time 50,000h  
Power Factor >0.90  
Ambient Temp -20°C to 50°C  
Housing Extruded aluminum  
Diffuser Polystyrene TP(a)



**RoHS CE**

**Dimensions**




# Square

Premium LED panels

- Save up to 70% energy usage compared to traditional fluorescent fittings
- Ultra-low glare, UGR<17\*
- TP(a) fire resistant diffuser
- Flicker free
- Optional DALI, 1-10V (0-10V) driver
- IP44 when ceiling recess mounted
- White powder coated aluminium frame

- Plug-in emergency
- Plug-in on/off sensor
- Wattage switching
- Flicker free
- Modular design
- Ultra high efficiency

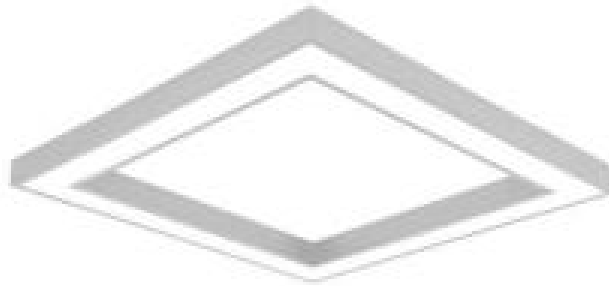

Order Code	Power	Dimension	CCT	Lumen	Trade Price
EPNL101034	34W	1000*1000*35	4000K	3400lm	
EPNL101068	68W	1000*1000*35	4000K	6800lm	