

Rena

Interior batten with integrated LED

- Switchable CCT (3000K/4000K/6000K)
 - Flicker free
- Plug & play microwave sensor module with corridor function
 - Plug & play emergency module
 - 20mm Conduit entry
 - BESA box fitting points

Plug-in emergency 

Plug-in corridor sensor 

CCT switching 

Flicker free 

Modular design 

Ultra high efficiency 

CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD


5 5 Years Standard Warranty

7 7 Years Extended Warranty

2000V Surge Protection (L to GND)



Microwave Sensor (Mounting height ≤8.5m)
EBTNLS1-MWS2

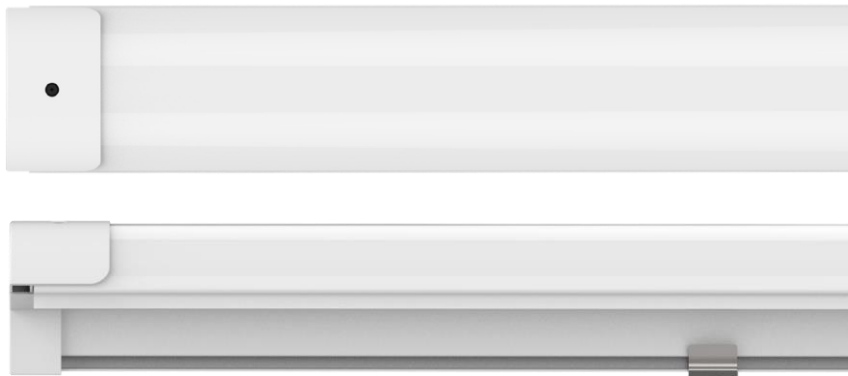

General Specification

Voltage 220-240Vac
50-60Hz
CRI 82
Life Time 50,000h
Power Factor 0.95
Ambient Temp -20°C to 45°C
Housing Polycarbonate



Order Code	Power	Length	CCT	Lumen	Trade Price
EBTNLS20LS1	20W	2ft	Switchable*	2300lm (3000K) 2600lm (4000K) 2600lm (6000K)	
EBTNLS40LS1	40W	4ft	Switchable*	4280lm (3000K) 4760lm (4000K) 4760lm (6000K)	
EBTNLS60LS1	60W	5ft	Switchable*	6150lm (3000K) 6800lm (4000K) 6800lm (6000K)	

* When CCT switchable, colour temperature switches between 3000K, 4000K & 6000K

Optional Gears

Type	Order code	Description	Trade Price
Emergency module	EEW05LBL/N	Emergency, with Li-ion battery	
Self-Test emergency module	EEW05LBL/S	Self-test emergency, with Li-ion battery	
Microwave Sensor	EBTNLS1-MWS2	Microwave motion and daylight sensor	

Accessories

Type	Order code	Description	Trade Price
Suspension Kit	EPTBTN/SUS1	Pair of 1m suspension wires	
BESA Box Clip	EBTNLS1-BESA	Mounting clip for installation on a BESA box	

Dimensions

