



5 5 Years
Standard Warranty

7 7 Years
Extended Warranty

2000V
Surge Protection
(L to GND)

General Specification

Voltage 220-240Vac
50-60Hz
CRI 80
Life Time 50,000h
Power Factor 0.95
Ambient Temp -20°C to 45°C
Housing Polycarbonate




Riva

Interior batten with integrated LED


- Switchable CCT (3000K/4000K/6000K)
- High efficiency up to 130lm/W
- Optional plug-in emergency module available
- For single and twin tube batten replacement
- 20mm Conduit entry
- BESA box fitting points

- Plug-in emergency
- Built-in motion sensor
- CCT switching
- Modular design
- Ultra high efficiency

CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD®

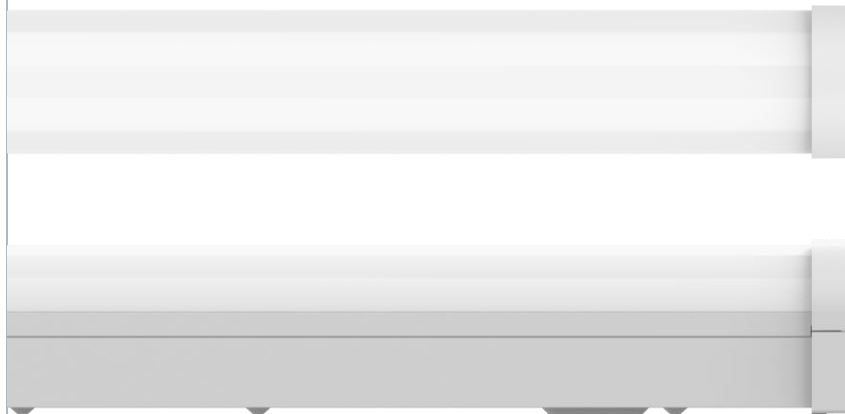

Dimensions

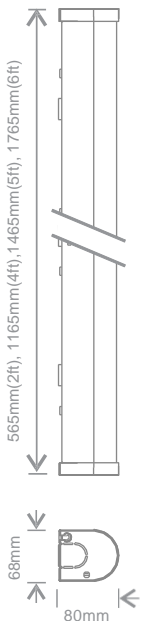

Single Output(with light output of single T8 batten)

Order Code	Type	Power	Length	CCT	Lumen	Trade Price
EBTN20LS4	Standard	20W	2ft	Switchable*	2400lm(3000K)	
					2600lm(4000K)	
					2600lm(6000K)	
EBTN40LS4	Standard	40W	4ft	Switchable*	4600lm(3000K)	
					4900lm(4000K)	
					4900lm(6000K)	
EBTN60LS4	Standard	60W	5ft	Switchable*	5800lm(3000K)	
					6200lm(4000K)	
					6200lm(6000K)	
EBTN80LS4	Standard	80W	6ft	Switchable*	6800lm(3000K)	
					7200lm(4000K)	
					7200lm(6000K)	

* When CCT switchable, colour temperature switches between 3000K, 4000K & 6000K