

Spectacle

LED Gimbal Light Single and Double Head

- Square and Rectangular recessed adjustable architectural downlight suitable for commercial, hospitality and retail applications
- Black trim provides excellent glare control
- Steel housing with die-cast aluminium body
- Dimmable and emergency option

CCT switching 

Plug-in emergency 

CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD®

EDL10WS



EDL2X10W



Order Code	Power	Beam Angle	Dimensions L W H	CCT	Lumen
EDL10WS	10W	40°	120*120*125mm	4000K	1200lm
EDL2X10W	20W	40°	275*145*125mm	4000K	2400lm
EDL20WS	20W	40°	185*185*145mm	4000K	2400lm
EDL2X20W	40W	40°	370*185*145mm	4000K	4800lm

* See datasheet for recommended number of lamps per dimmer

5 5 Years Standard Warranty

7 7 Years Extended Warranty

500V Surge Protection

Mains Dimmable Dimmable

100mm*100mm Cut-out

255mm*125mm Cut-out

165mm*165mm Cut-out


345mm*165mm Cut-out

General Specification


Voltage 220-240Vac
50-60Hz
CRI >80
Life Time 50,000h
Power Factor 0.90
Ambient Temp -20°C to 45°C
Housing Aluminium



Dimensions

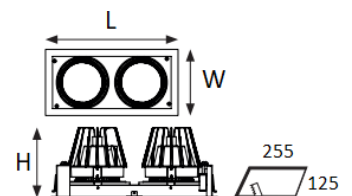

EDL2X10W

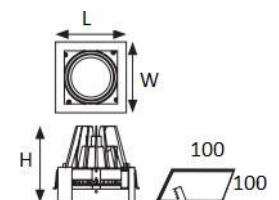

EDL10WS