



3 3 Years
Standard Warranty

5 5 Years
Extended Warranty

1000V
Surge Protection

Bio

Thin profile non-corrosive linear luminaire with integrated LED


- High efficiency of 118lm/W
- Single ended connections with wires to terminals
- Suitable for interior or outdoor use
- IP65 and durable and rugged IK08 polycarbonate construction

Ultra high efficiency


CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD®

General Specification

Voltage 220-240Vac
50-60Hz
CRI >80
Life Time 50,000h
Power Factor 0.90
Ambient Temp -20°C to 50°C
Housing Polycarbonate

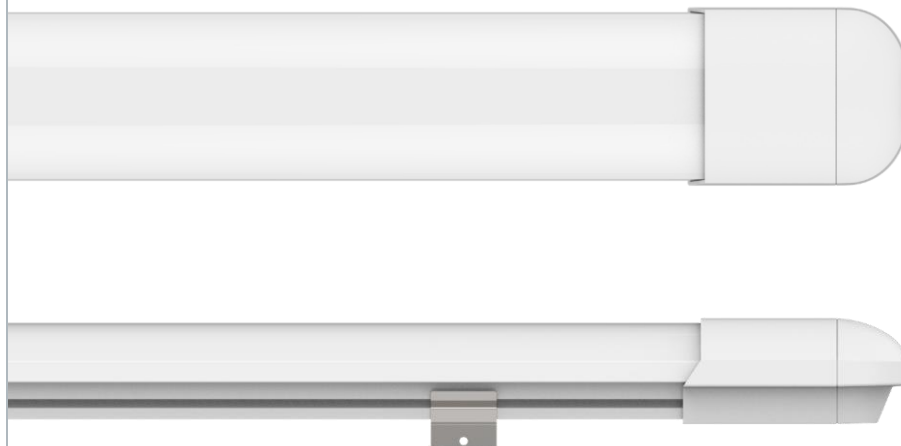

Dimensions

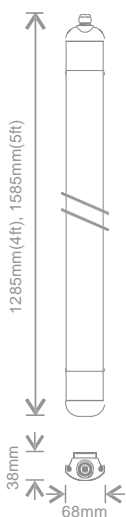

| Order Code | Power | Length | CCT | Lumen | Trade Price |
|------------|-------|--------|-------|--------|-------------|
| EBTN28LS10 | 28W | 4ft | 4000K | 3700lm | |
| EBTN38LS10 | 38W | 5ft | 4000K | 5000lm | |