



5 5 Years
Standard Warranty

7 7 Years
Extended Warranty

1000V
Surge Protection



Bolta

Non-corrosive batten with integrated LED

- IP65 compliant, suitable for indoor or outdoor use
- Durable and rugged IK08 polycarbonate construction
- High efficiency output
- Class I
- Designed for interlink with pass-through wiring
- Switchable CCT (3000/4000/6000K)
- Instant start

CCT switching

Ultra high efficiency


CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD®

General Specification

Voltage 220-240Vac
50-60Hz
CRI >80
Life Time 50,000h
Power Factor 0.96
Ambient Temp -20°C to 50°C
Housing Polycarbonate



Dimensions

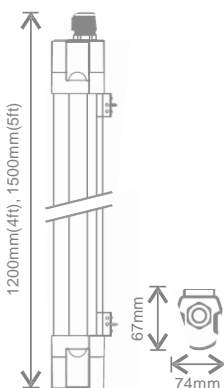

Order Code	Power	Length	CCT	Lumen	Trade Price
EINC36B4F	36W	4ft	Switchable*	4200lm	
EINC48B5F	48W	5ft	Switchable*	6000lm	

* When CCT switchable, colour temperature switches 3000K, 4000K & 6000K

Accessories

Type	Order Code	Description	Trade Price
Suspension kit	EPTBTN/SUS5	Maximum 2.0m drop	
Interlock Connector	EPT-KBTN-CI1	Inline Interlock connector	