

Pico Mini


Low-power LED floodlight

- Modular construction allows each module to be angled independently
- High efficiency of 160lm/W
 - IP66, IK09
 - High power 50W-200W
- Multiple options for optics including asymmetric options

Flicker free

Ultra high efficiency

CHIP **OSRAM** **LUMILEDS**
 DRIVER **PHILIPS** **MEAN WELL**

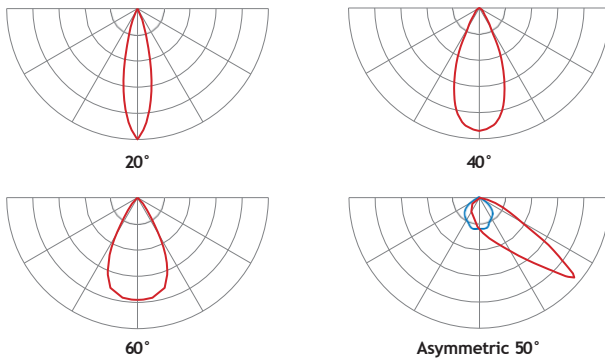

Order Code	Power	Beam Angle	Finish	CCT	Lumen	Trade Price
EFLD50Q	50W	20°/ 40° / 60° Asymmetric 50°	Grey	5000K	4800lm	
EFLD100Q	100W	20°/ 40° / 60° Asymmetric 50°	Grey	5000K	9600lm	
EFLD150Q	150W	20°/ 40° / 60° Asymmetric 50°	Grey	5000K	14400lm	
EFLD200Q	200W	20°/ 40° / 60° Asymmetric 50°	Grey	5000K	19200lm	

1-10V (standard) DALI / Photocell / DMX512 as special order

- 5** Years Standard Warranty
- 7** Years Extended Warranty
- 10000V** Surge Protection (L to GND)
- 100-277V** Input voltage

General Specification

Voltage 100-277Vac
50-60Hz
CRI >70
Life Time 54,000h
Power Factor 0.96
Ambient Temp -30°C to 55°C
Housing Power coated aluminum



Dimensions

