

5 5 Years
Standard Warranty

7 7 Years
Extended Warranty

1000V
Surge Protection
(L to GND)



EBRK112GRD



EBRK103VER

General Specification

Voltage 220-240Vac
50-60Hz
CRI >80
Life Time 50,000h
Power Factor >0.96
Ambient Temp -20°C to 50°C
Housing Diecast aluminum



Blaze

LED brick light


- Die-cast aluminium body with polycarbonate front cover
- Polycarbonate back box for easy installation
- Choice of styles and mounting positions
- Black and dark grey textured powder coat finishing

CHIP **OSRAM** LUMILEDS
DRIVER **PHILIPS** LIFUD



EBRK112STD

Dimensions

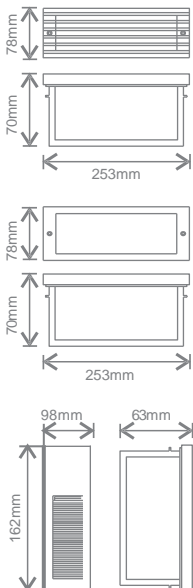

Order Code	Power	Beam Angle	Finish	CCT	Lumen	Trade Price
EBRK112GRD	12W	55°	Black Grey	4000K	710lm	
EBRK112STD	12W	63°	Black Grey	4000K	720lm	
EBRK103VER	3W	22°	Black Grey	4000K	140lm	